

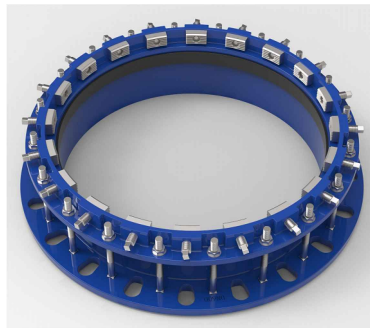


Fig:FA802-B

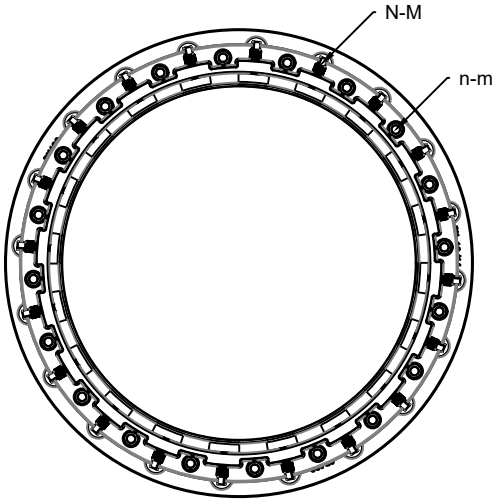

■ Features


- Ductile Iron GGG50 material with FBE coated.
- PN10.PN 16 working pressure.
- Equipped with Dacromet Coated Steel bolts, nuts.
- EPDM or NBR rubber seals .
- High Tolerance Mechanical Pipe Fittings

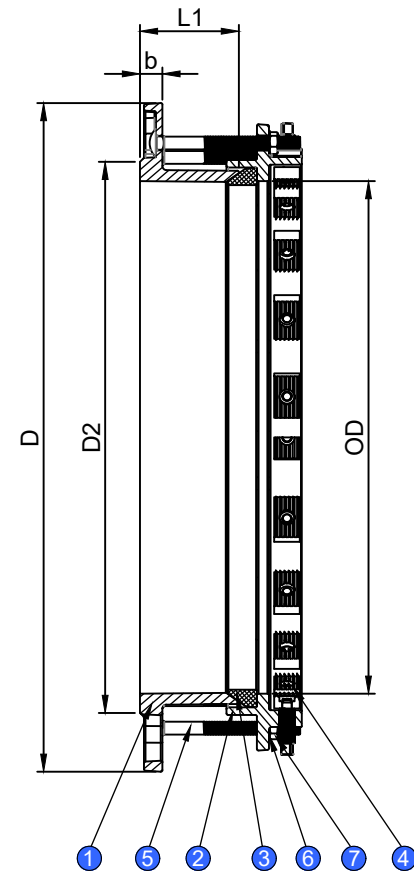

Material Specification:

No.	Parts Name	Material	Specification
1	Body	Ductile Iron	GGG50
2	End Ring	Ductile Iron	GGG50
3	Rubber Seal	Rubber	EPDM
4	Grip Tooth	SS304	
5	Bolt	Dacromet Coated Steel	ISO898-1:1999
6	Washer	Dacromet Coated Steel	
7	Nut	Dacromet Coated Steel	ISO898-1:1992
8	Cap	Plastic	

1:Flange dimensions according to EN1092-2
 2:Any definite information kindly contact with Hiwa directly.

DRAWER		TOLERANCE		MATERIAL:	UNIT:mm
CHECK		SCALE		Tensile Restrained Flange Adaptor	
APPROVAL		DATE	03/19/20		
				REV	202003A

This document is the property of Huihua Valve Industry Co. Distribution of this document without the written consent of the owner is strictly forbidden. Failure to comply will incur a liability for damages.
 http://www.hiwaflow.com Website sales@hiwaflow.com Email
 86 - 533 - 6077217 Phone 86 - 533 - 6077233 FAX
 Huihua Valve Industry co. No.36 MinAn Road New Hi-Tech Industry Zone Zibo Shandong China 255088 p.c